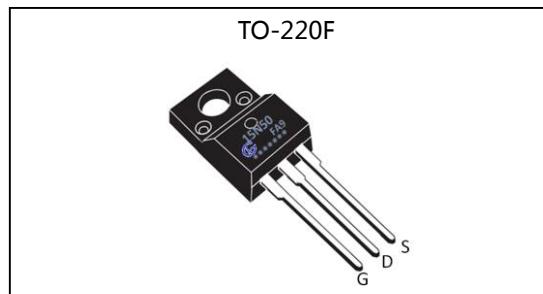



**Silicon N-Channel Power MOSFET**
**General Description :**

GL15N50FA9, the silicon N-channel Enhanced VDMOSFET, is obtained by the self-aligned planar Technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor can be used in various power switching circuit for system miniaturization and higher efficiency. The package form is TO-220F, which accords with the RoHS standard.

V <sub>DSS</sub>	500	V
I <sub>D</sub>	15	A
P <sub>D</sub> (T <sub>C</sub> =25°C)	70	W
R <sub>DS(ON),TYP.</sub>	0.29	Ω


**Features :**

- Fast Switching
- Low ON Resistance( $R_{dson} \leq 0.35\Omega$ )
- Low Gate Charge
- Low Reverse transfer capacitances
- 100% Single Pulse avalanche energy Test

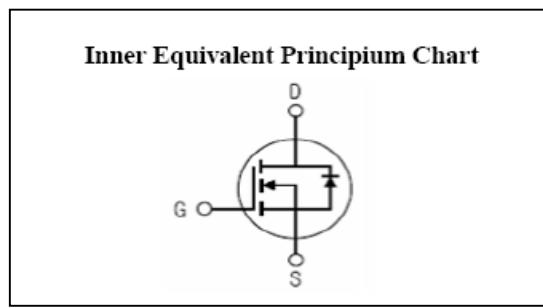
**Applications:**

- Power switch circuit of adaptor and charger

**Absolute ( T<sub>C</sub>=25°C unless otherwise specified ) :**

Symbol	Parameter	Rating	Units
V <sub>DSS</sub>	Drain-to-Source Voltage	500	V
I <sub>D</sub>	Continuous Drain Current	15	A
I <sub>DM<sup>a1</sup></sub>	Pulsed Drain Current	60	A
V <sub>GS</sub>	Gate-to-Source Voltage	±30	V
E <sub>As<sup>a2</sup></sub>	Single Pulse Avalanche Energy	1200	mJ
P <sub>D</sub>	Power Dissipation	70	W
	Derating Factor above 25°C	0.56	W/°C
T <sub>J</sub> , T <sub>stg</sub>	Operating Junction and Storage Temperature Range	150, -55 to 150	°C
T <sub>L</sub>	Maximum Temperature for Soldering	300	°C

Caution Stresses greater than those in the "Absolute Maximum Ratings" may cause permanent damage to the device



# GL15N50FA9

无锡光磊电子科技有限公司

Silicon N-Channel Power MOSFET

## Thermal Characteristics

Symbol	Parameter	Rating	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	1.79	°C / W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	100	°C / W

Electrical Characteristics (  $T_c = 25^\circ C$  unless otherwise specified ) :

### OFF Characteristics

Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$V_{DSS}$	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	500	--	--	V
$\Delta V_{DSS}/\Delta T_J$	Bvdss Temperature Coefficient	$I_D=250\mu A$ , Reference $25^\circ C$	--	0.55	--	V/ $^\circ C$
$I_{DSs}$	Drain to Source Leakage Current	$V_{DS}=500V, V_{GS}=0V, T_a=25^\circ C$	--	--	1.0	$\mu A$
		$V_{DS}=400V, V_{GS}=0V, T_a=125^\circ C$	--	--	100	
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS}=+30V$	--	--	100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS}=-30V$	--	--	-100	nA

### ON Characteristics

Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10V, I_D=7.5A$	--	0.29	0.35	$\Omega$
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	--	4.0	V
$g_f$	Forward Trans conductance	$V_{DS}=15V, I_D=15A$	--	18	--	S

Pulse width < 380μs; duty cycle < 2%.

### Dynamic Characteristics

Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$C_{iss}$	Input Capacitance	$V_{GS}=0V, V_{DS}=25V$ $f=1.0MHz$	--	2350	--	pF
$C_{oss}$	Output Capacitance		--	230	--	
$C_{rss}$	Reverse Transfer Capacitance		--	25	--	

### Resistive Switching Characteristics

Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	$I_D=15A, V_{DD}=250V$ $V_{GS}=10V, R_g=6.1\Omega$	--	15	--	ns
$t_r$	Rise Time		--	30	--	
$t_{d(OFF)}$	Turn-Off Delay Time		--	50	--	
$t_f$	Fall Time		--	40	--	
$Q_g$	Total Gate Charge	$I_D=15A, V_{DD}=250V$ $V_{GS}=10V$	--	50	--	nC
$Q_{gs}$	Gate to Source Charge		--	12	--	
$Q_{gd}$	Gate to Drain ( "Miller" )Charge		--	20	--	

Wuxi Guang Lei electronic technology co., LTD

**GL15N50FA9**


无锡光磊电子科技有限公司

*Silicon N-Channel Power MOSFET***Source-Drain Diode Characteristics**


Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$I_{SD}$	Continuous Source Current (Body Diode)		--	--	15	A
$I_{SM}$	Maximum Pulsed Current (Body Diode)		--	--	60	A
$V_{SD}$	Diode Forward Voltage	$I_S=15A, V_{GS}=0V$	--	--	1.5	V
$t_{rr}$	Reverse Recovery Time	$I_S=15A, T_j=25^\circ C$	--	580	--	ns
$Q_{rr}$	Reverse Recovery Charge	$dI_F/dt=100A/\mu s, V_{GS}=0V$	--	4.5	--	$\mu C$

a1 : Repetitive rating; pulse width limited by maximum junction temperature


a2 : L=10mH,  $I_D=15A$ , Start  $T_j=25^\circ C$

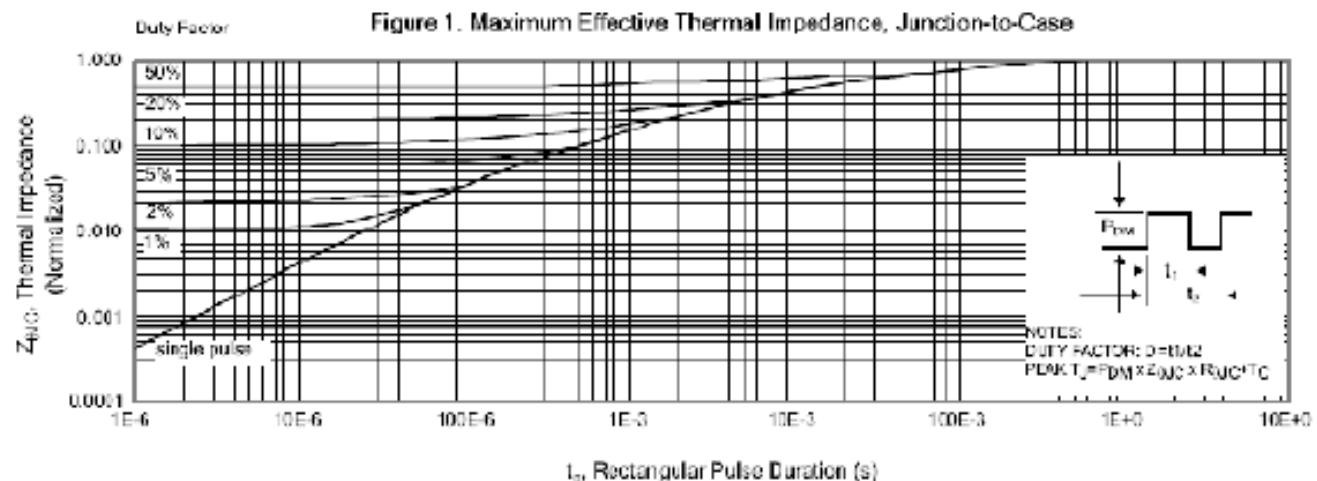**Silicon N-Channel Power MOSFET**
**Characteristics Curve:**


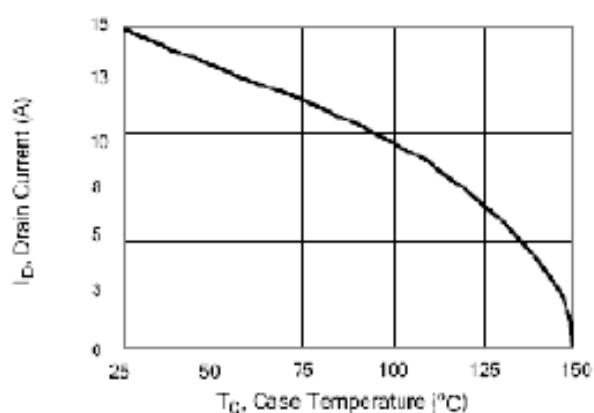
**Figure 2. Maximum Power Dissipation vs Case Temperature**

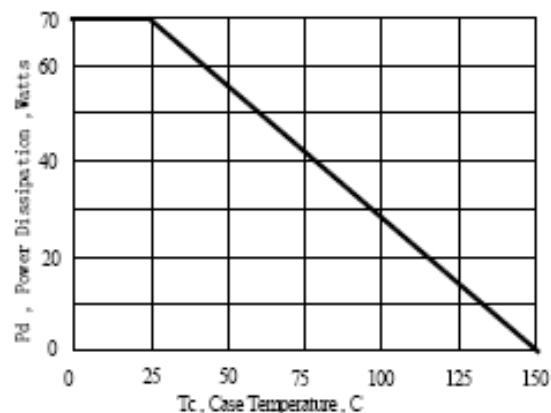


**Figure 4. Typical Output Characteristics**

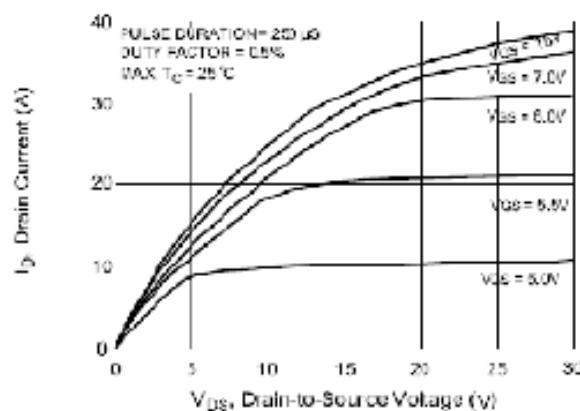

**Figure 3. Maximum Continuous Drain Current vs Case Temperature**



**Figure 5. Typical Drain-to-Source ON Resistance vs Gate Voltage and Drain Current**

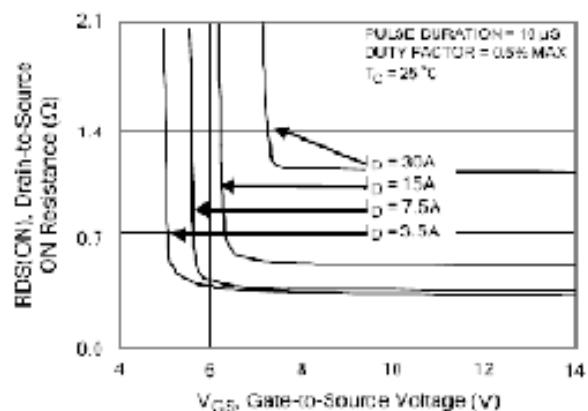

**Silicon N-Channel Power MOSFET**

Figure 6. Maximum Peak Current Capability

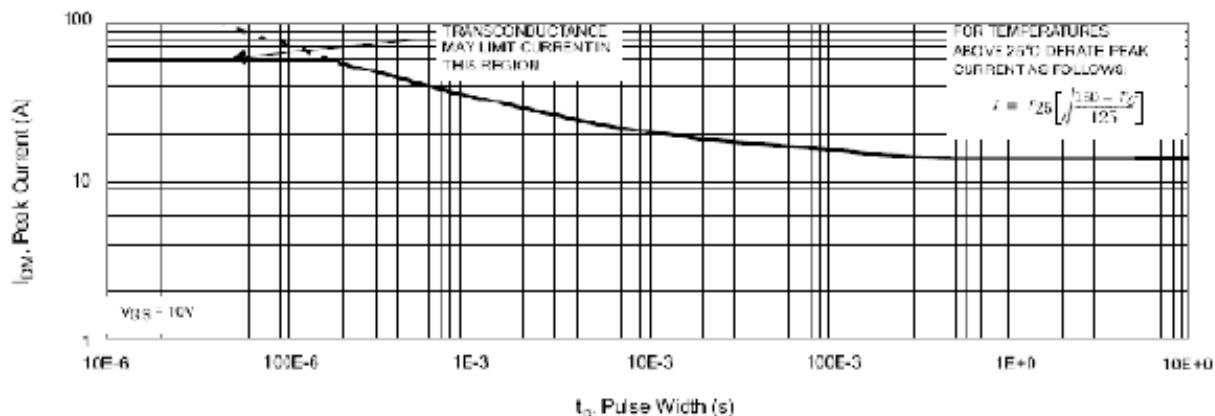


Figure 7. Typical Transfer Characteristics

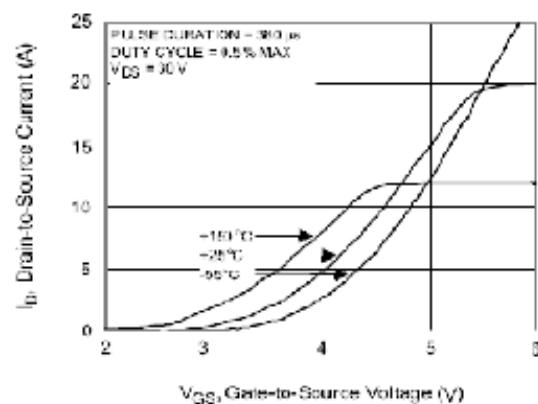


Figure 8. Unclamped Inductive Switching Capability

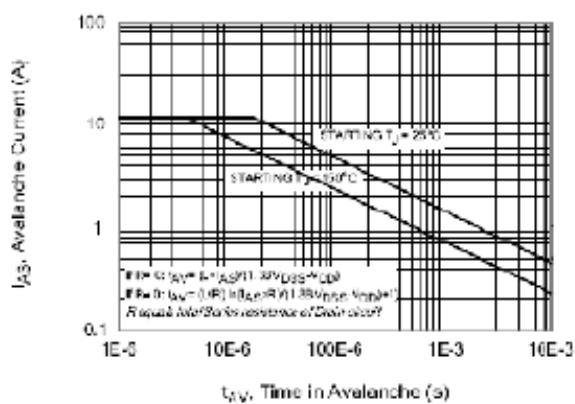


Figure 9. Typical Drain-to-Source ON Resistance vs Drain Current


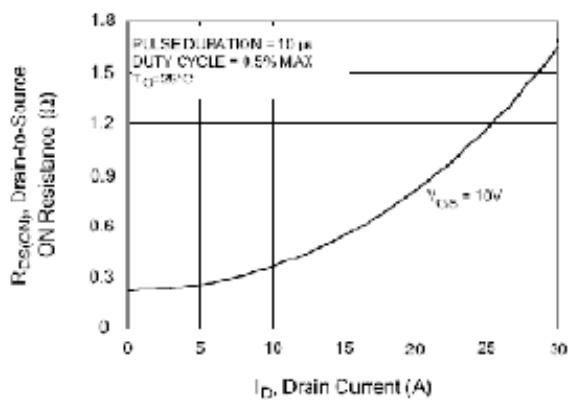


Figure 10. Typical Drain-to-Source ON Resistance vs Junction Temperature

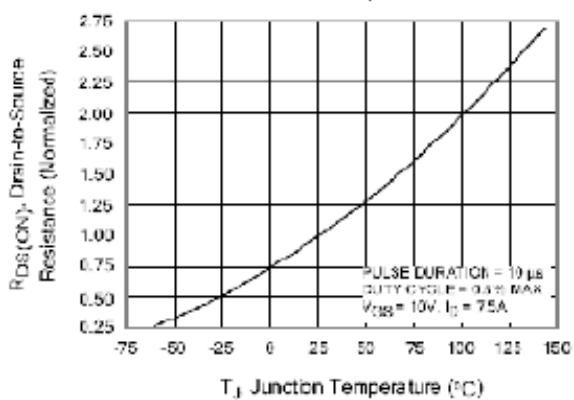

Company : Wuxi Guang Lei electronic technology co., LTD

TEL : 13912355536 Mr.tang